

TWISTER² – Tube Bending System for the Production of Two- and three-dimensional Parts made of Tube and Solid Material



TWISTER²
12-RL
18-RL
20-R
25-RL
35-RL

TWISTER²

12-RL

18-RL

20-R

25-RL

35-RL

▼ TWISTER² 20-R



▼ Bending tool TWISTER² 18-RL



Our Accomplishments for Your Benefit

- TWISTER² speaks EasyWay - the control platform for robot and machine
- Unique, fully integrated system
- Process reliability and productivity leap for a flexible production of three-dimensional geometries
- Intelligent combination of handling and bending tasks thanks to collaboration between robot and bending unit
- Modular design enables incorporation of external systems and subsequent processes
- Freely selectable bending sequence of geometry elements

Control System

- Reliable WPS 3.2 EasyWay control concept
- Interactive graphical 3D programming of tubes, transfer of drawing dimensions
- Fully integrated robot concept with cross-system programming that requires no robot knowledge
- *iQtube* for graphically simulating the bending sequence, with integrated collision monitoring and theoretical output calculation
- Joint transformation of all machine and robot axes

Design Features

- Newly developed rotary gripper for complete rotation of the workpiece in one clamping and freely programmable regrabbing function for every gripper position
- The optional Power Gripper enables shortest clamping lengths with highest gripping force
- Different bending heads for rotary-draw bending and a modular system enable customized machine configurations
- Short set-up times due to sophisticated tool solutions

▼ Bending head TWISTER² 12-RL



Precise, Reliable, Versatile and Profitable – WAFIOS TWISTER²

Perfect Union of Design and Functionality

A modular concept combines robot and bending technology at the highest level. The fully integrated robot control guarantees a simple programming process while maximum flexibility and integrated automation is ensured.

The newly developed bending system meets highest demands with respect to:

- Output and bending quality
- Greater range of parts thanks to extremely high degrees of freedom.
- Automation and linking of applications / process steps
- Maintenance, service and user friendliness

The unique modular system meets demands flexibly and ideally and enables an integration of different tasks in one fully automatic machinery system. The integration of customer-side processes or the combination of multiple TWISTER² machines is possible. (Example: Twister² TWINS)

Quality


For more than 130 years, the name of WAFIOS has been synonymous with highest quality, safety standards, and technical innovations in the German machine manufacturing industry.

Reliability

Strict quality controls, state-of-the-art production systems, and many years of experience guarantee that your investment is safe in our hands. Our global service network ensures high availability of WAFIOS machinery.



Cost efficiency

High production output and a long service life will save money and shorten the amortization time of your investment.

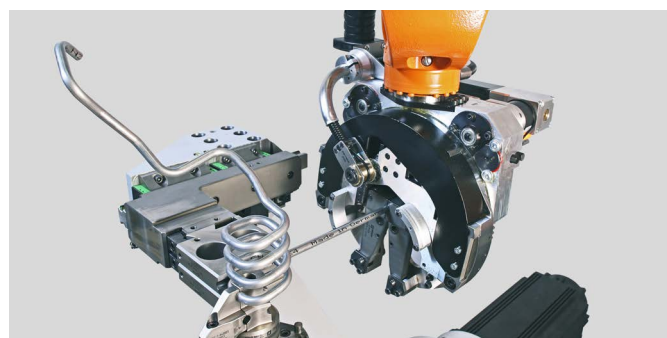


▲ Rotary gripper with bending head

▼ TWISTER² TWINS

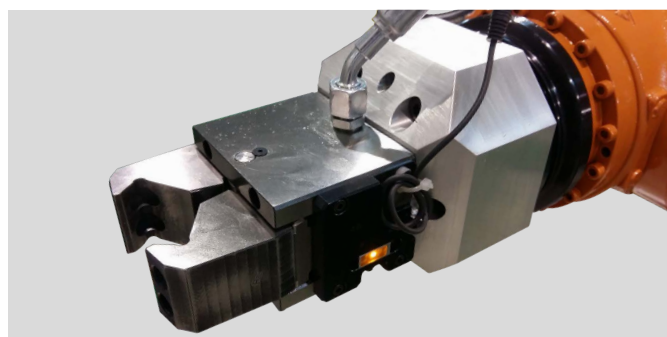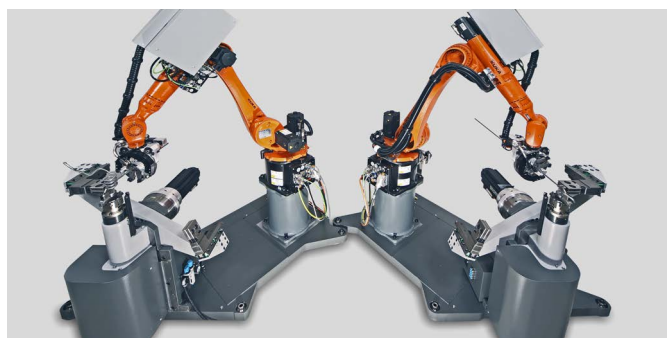

▲ Power Gripper

Technical Data	TWISTER ² 12-RL	TWISTER ² 18-RL	TWISTER ² 20-R	TWISTER ² 25-RL	TWISTER ² 35-RL
Work area Max. tube diameter Nominal bending moment according to (VDI 3421) Standard length from magazine	12.7 mm 74 Nm 2,000 mm (3,000 mm option)	18.0 mm 220 Nm 2,000 mm (3,000 mm option)	20.0 mm 360 Nm 2,000 mm (3,000 mm option)	25.4 mm 510 Nm 2,000 mm (4,000 mm option)	1-35 mm 1.200 Nm 2.000 mm (4.000 mm Option)
CNC axes Machine axes completely integrated into robot axes Bending head	4 3	4 +1 servomotor-driven vertical clamping function (option) 3 +1 servomotor-driven pressure die +1 servomotor-driven tube support (option)	4 3 +1 servomotor-driven tube support +1 servomotor-driven pressure die	4 5 +1 Positioning unit	4 5 +1 Positioning unit
Tube grippers Rotary Gripper Power Gripper Operating principle	Yes Yes Pneumatic	Yes Yes Pneumatic	No Yes Pneumatic	No Yes Pneumatic	No Yes Pneumatic
Programming Control of robot by Machine axes Length/angle Coordinates Job order lists Simulation	Yes Yes Yes Yes Option	Yes Yes Yes Yes Option	Yes Yes Yes Yes Option	Yes Yes Yes Yes Option	Yes Yes Yes Yes Option
Machine control	WPS 3.2 EasyWay	WPS 3.2 EasyWay	WPS 3.2 EasyWay	WPS 3.2 EasyWay	WPS 3.2 EasyWay
Automation Loading from a magazine Position-oriented discharge	Option Yes	Option Yes	Option Yes	Option Yes	Option Yes
Linking of other processes	Yes	Yes	Yes	Yes	Yes

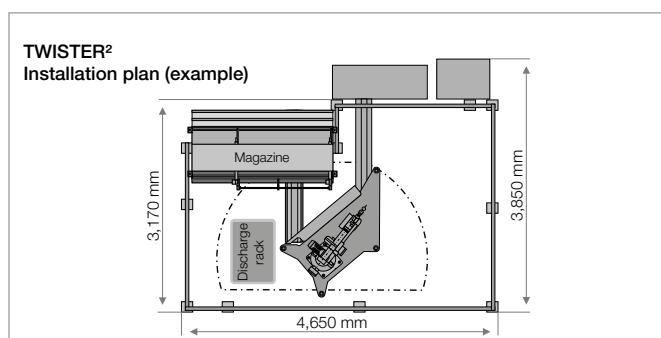

WAFIOS AG

Silberburgstraße 5
72764 Reutlingen, Germany
Phone +49 7121 146-0
Fax +49 7121 146-250
sales@wafios.de
www.wafios.com

Precision Machinery for Wire and Tube